

1N5415 THRU 1N5420

GLASS PASSIVATED FAST SWITCHING RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 3.0 Amperes

FEATURES

- ◆ Glass passivated cavity-free junction
- ◆ High temperature metallurgically bonded construction
- ◆ Hermetically sealed package
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ Fast switching for high efficiency
- ◆ High temperature soldering guaranteed: 350°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: Solid glass body

Terminals: Solder plated axial leads, solderable per MIL-STD-750, Method 2026


Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.037 ounce, 1.04 grams

PATENTED*

Case Style G4

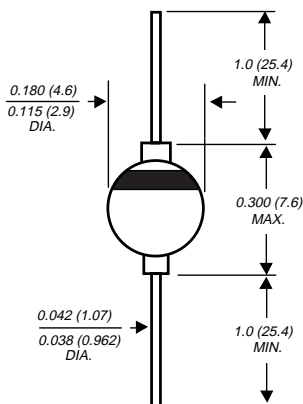

Dimensions in inches and (millimeters)

* Brazed-lead assembly is covered by Patent No. 3,930,306

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | 1N5415 | 1N5416 | 1N5417 | 1N5418 | 1N5419 | 1N5420 | UNITS |
|--|-----------------------------------|--------------------|--------|--------|--------|--------|--------|-------|
| *Maximum repetitive peak reverse voltage | V _{RRM} | 50 | 100 | 200 | 400 | 500 | 600 | Volts |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 280 | 350 | 420 | Volts |
| *Maximum DC blocking voltage | V _{DC} | 50 | 100 | 200 | 400 | 500 | 600 | Volts |
| *Minimum reverse breakdown voltage at 50μA | V _{BR} | 55 | 110 | 220 | 440 | 550 | 660 | Volts |
| *Maximum average forward rectified current 0.375" (9.5mm) lead lengths at T _A =55°C | I _(AV) | 3.0 | | | | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T _A =100°C | I _{FSM} | 80.0 | | | | | | Amps |
| Maximum instantaneous forward voltage at 3.0A* 9.0A | V _F | 1.10 1.50 | | | | | | Volts |
| Maximum DC reverse current at rated DC blocking voltage *T _A =25°C T _A =100°C *T _A =175°C | I _R | 1.0 20.0 2.0 | | | | | | μA |
| *Maximum reverse recovery time (NOTE 1) | t _{rr} | 150 | | | | 250 | 400 | ns |
| *Maximum junction capacitance (NOTE 2) | C _J | 200 | 175 | 150 | 120 | 110 | 100 | pF |
| Typical thermal resistance (NOTE3) | R _{θJA} | 22.0 | | | | | | °C/W |
| *Operating and storage temperature range | T _J , T _{STG} | -65 to +175 | | | | | | °C |

NOTES:

(1) Reverse recovery test conditions: I_F=0.5A, I_R= 1.0A, I_{rr}=0.25A

(2) Measured at 1.0 MHz and applied reverse voltage of 12.0 Volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, with both leads to heat sink

*JEDEC registered values

RATINGS AND CHARACTERISTIC CURVES 1N5415 THRU 1N5420

FIG. 1 - FORWARD CURRENT DERATING CURVE

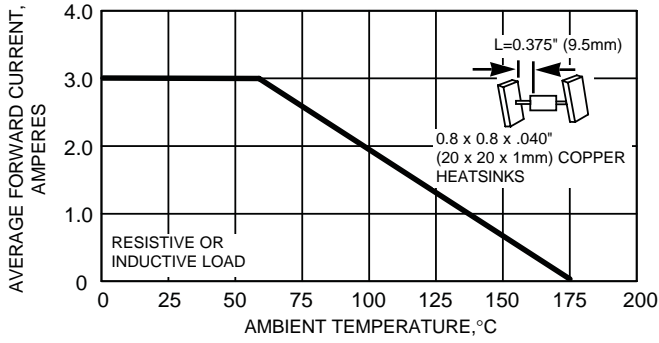


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

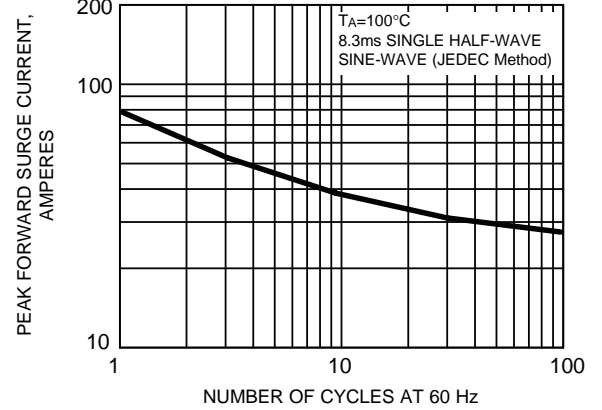


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

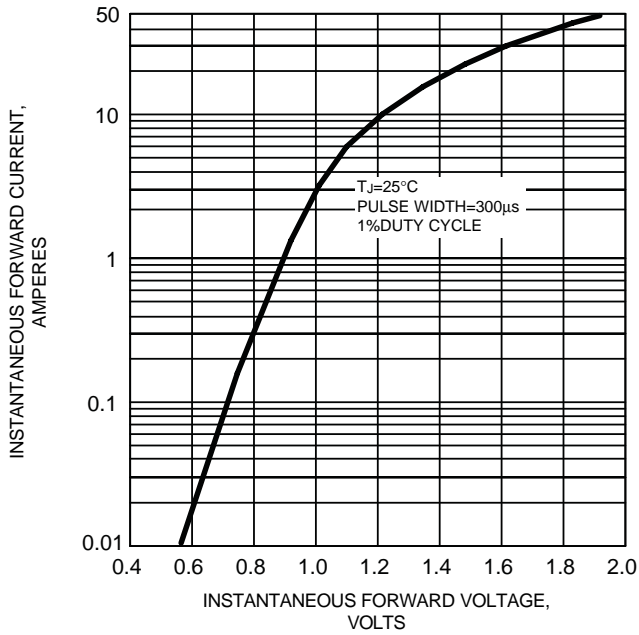


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


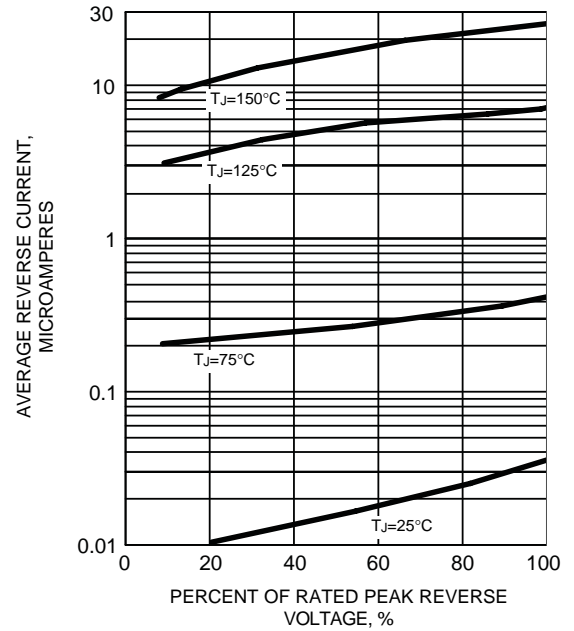


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

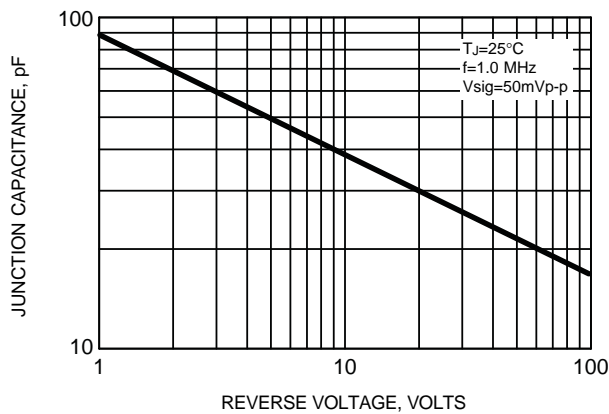

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.