



CHENYI ELECTRONICS

# W005 THRU W10

## SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIER

Voltage: 50 TO 1000V CURRENT:1.0A


### FEATURES

- Ideal for printed circuit board
- Surge overload rating: 50A peak
- High case dielectric strength

### MECHANICAL DATA

- Terminal:** Plated leads solderable per MIL-STD 202E, method 208C
- Case:** UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity:** Polarity symbol marked on body
- Mounting position:** any

### WOB

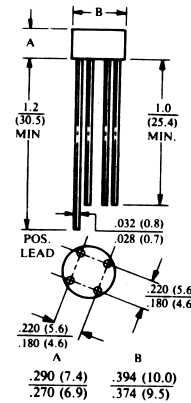

Dimensions in inches and (millimeters)


### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60HZ, resistive or inductive load rating at 25 °C , unless otherwise stated, for capacitive load, derate current by 20%)


	SYMBOL	W005	W01	W02	W04	W06	W08	W10	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>rms</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V <sub>dc</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified current at Ta=50 °C	I <sub>f(av)</sub>	1							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	50							A
Maximum Instantaneous Forward Voltage at forward current 1.0A	V <sub>f</sub>	1.0							V
Maximum DC Reverse Voltage Ta=25 °C	I <sub>r</sub>	10.0							μ A
at rated DC blocking voltage Ta=100 °C		1.0							m A
Operating Temperature Range	T <sub>j</sub>	-55 to +125							°C
Storage and operation Junction Temperature	T <sub>stg</sub>	-55 to +150							°C

**RATINGS AND CHARACTERISTIC CURVES W005 THRU W10**


**FIG.1-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

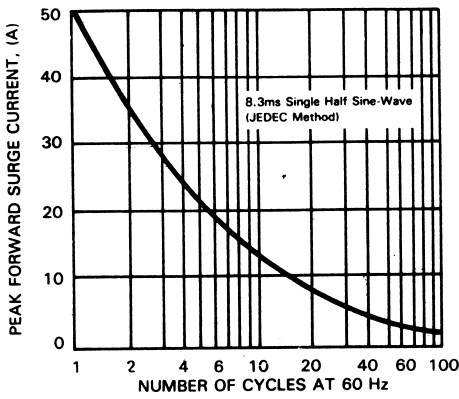


**FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE**

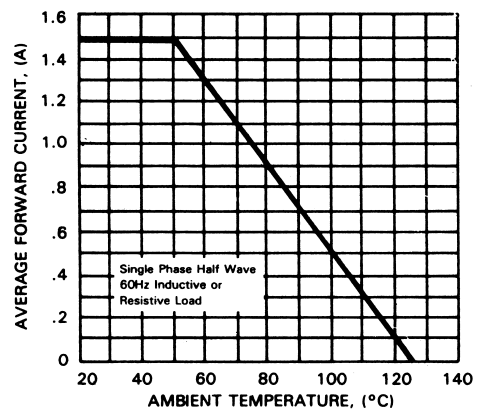

**FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

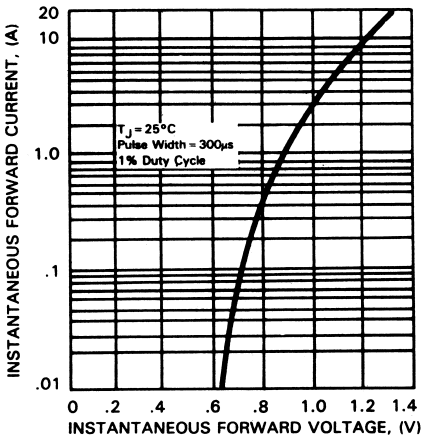

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

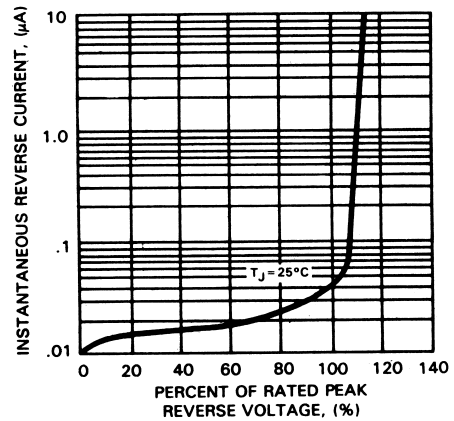

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.