


# TO-3P 16A Triac

## TM1641P-L(L), TM1661P-L(L)

### Features

- Repetitive peak off-state voltage:  $V_{DRM}=400, 600V$
- RMS on-state current:  $I_{T(RMS)}=16A$
- Gate trigger current:  $I_{GT}=30mA$  max (MODE I, II, III)

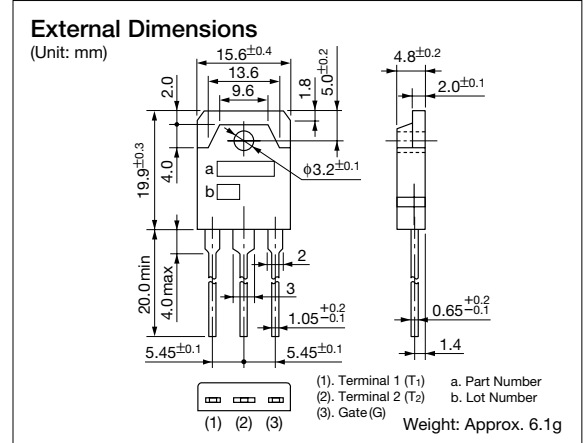

### Absolute Maximum Ratings

Parameter	Symbol	Ratings		Unit	Conditions
		TM1641P-L(L)	TM1661P-L(L)		
Repetitive peak off-state voltage	$V_{DRM}$	400	600	V	
RMS on-state current	$I_{T(RMS)}$	16		A	Conduction angle 360°, $T_c=103^\circ C$
Surge on-state current	$I_{TSM}$	160		A	50Hz full-cycle sinewave, Peak value, Non-repetitive, $T_j=125^\circ C$
Peak gate voltage	$V_{GM}$	10		V	
Peak gate current	$I_{GM}$	2		A	
Peak gate power loss	$P_{GM}$	5		W	
Average gate power loss	$P_{G(AV)}$	0.5		W	
Junction temperature	$T_j$	-40 to +125		$^\circ C$	
Storage temperature	$T_{stg}$	-40 to +125		$^\circ C$	

### Electrical Characteristics

( $T_j=25^\circ C$ , unless otherwise specified)

Parameter	Symbol	Ratings			Unit	Conditions	
		min	typ	max			
Off-state current	$I_{DRM}$			2.0	mA	$V_D=V_{DRM}, R_{GK}=\infty, T_j=125^\circ C$	
				0.1		$V_D=V_{DRM}, R_{GK}=\infty, T_j=25^\circ C$	
On-state voltage	$V_{TM}$			1.6	V	Pulse test, $I_{TM}=20A$	
Gate trigger voltage	$V_{GT}$	I	0.8	1.5	V	$V_D=6V, R_L=10\Omega, T_c=25^\circ C$	$T_2^+, G^+$
		II	0.7	1.5			$T_2^+, G^-$
		III	0.8	1.5			$T_2^-, G^-$
		IV	1.0				$T_2^-, G^+$
Gate trigger current	$I_{GT}$	I	12	30	mA	$V_D=6V, R_L=10\Omega, T_c=25^\circ C$	$T_2^+, G^+$
		II	16	30			$T_2^+, G^-$
		III	25	30			$T_2^-, G^-$
		IV	70				$T_2^-, G^+$
Gate non-trigger voltage	$V_{GD}$	0.2			V	$V_D=1/2 \times V_{DRM}, T_j=125^\circ C$	
Holding current	$I_H$		25		mA	$V_D=6V$	
Thermal resistance	$R_{th}$			1.2	$^\circ C/W$	Junction to case	

**TM1641P-L(L), TM1661P-L(L)**